

## LEVIR/PRO

### ES

Montaje: Empotrable.

Fuente de luz: Módulos lineales LED SMD.

Temperatura de color seleccionable: 3000K, 4000K, 6000K.

Sistema óptico: Difusor microprismático.

Distribución luminosa: Directa.

Equipo eléctrico: Equipo de control electrónico. PF>0,95.

Bajo consulta, regulable 1-10V o DALI y/o kit de emergencia (1-3 h).

Materiales: Cuerpo: Acero de alta resistencia a la torsión y espesores mínimos garantizados de 0,6mm, según Normas ENEC-10 y VDE.

Difusor: Microprisma longitudinal de gran transparencia y pureza, realizado en PMMA con sistema óptico anti-deslumbrante.

Acabado: Color blanco RAL 9003.



### EN

Mounting: Recessed.

Light source: LED linear modules SMD.

Selectable temperature color: 3000K, 4000K, 6000K.


Optical system: Microprismatic diffuser.

Light distribution: Direct.

Electrical equipment: Electronic control gear. PF>0,95. Under request, dimmable 1-10V or DALI and/or emergency kit (1-3 h).

Materials: Body: Highly torsion-resistant steel with a guaranteed minimum thickness of 0.6 mm, in accordance with ENEC-10 and VDE standards. Diffuser: Longitudinal microprism of high transparency and purity, made of PMMA with anti-glare optical system.


Surface finish: White color RAL 9003.

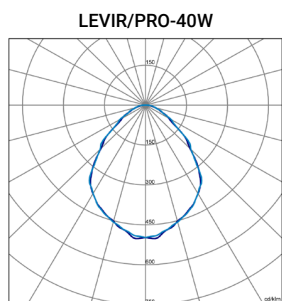


BAJO CONSULTA/UNDER REQUEST  
TUNABLE WHITE



### TAMAÑO Y NUMERO DE MODULOS PERSONALIZABLE/CUSTOMIZABLE SIZE AND NUMBER OF MODULES

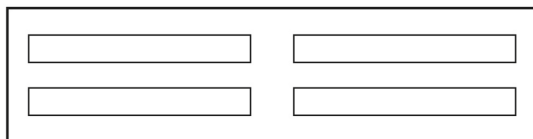


1195x295 + 4 MOD.



1195x185 + 2 MOD.



1495x185 + 2 MOD.

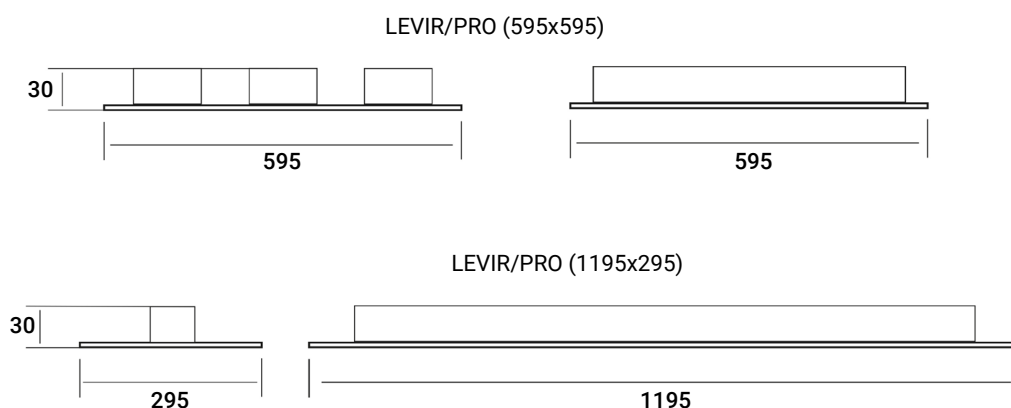

ESTANDAR/STANDARD

- 5 AÑOS  
5 YEARS
- 220-240V  
50-60Hz
- IP 40
- IK 02
- CLASE I  
CLASS I
- 50.000h  
L80B10
- 20°  
+40°
- CRI 80

DISPONIBLE/AVAILABLE

- 1-10V  
DALI
- EMERGENCY  
1h  
3h

Código Code	Referencia Reference	Kg Kg	Potencia Power	Lúmenes Lumens	Eficiencia Efficiency	CCT (K) CCT (K)
LVP314K8B	LEVIR/PRO-40W 4800lm/830-840-860 (1195x295)	3,0	40W	4600	120 lm/W	4000
LVP227K2B	LEVIR/PRO-60W 7200lm/830-840-860 (595x595)	3,0	60W	6100	120 lm/W	4000

**ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES**

- REGULACION/DIMING 1-10V | DALI      KIT DE EMERGENCIA/EMERGENCY KIT 1h | 3h      ACCESORIO PARA EMPOTRAR/ACCESSORY FOR RECESS
- ACCESORIO PARA ADOSAR/ACCESSORY FOR SURFACE      KIT PARA ADOSAR/KIT FOR SURFACE      SET DE SUSPENSION/SUSPENSION SET
- MUELLES PARA TECHO DE ESCAYOLA/PLASTER CEILING SPRINGS      GARRAS PARA TECHO CLIP-IN, TECHO OCULTO.../BRACKETS FOR CLIP-IN CEILING, HIDDEN CEILING...
- RECIPIENTE DE LUZ + DETECTOR DE PRESENCIA (SI/D) / LIGHT SENSOR + PRESENCE DETECTOR (SI/D)      DETECTOR DE PRESENCIA (SI/D)/PRESENCE DETECTOR (SI/D)